

PNEUMATIC / HYDRAULIC PRESSURE SWITCH



3 way , 2 positions pneumatic/hydraulic pressure valves, actuated by adjustable pneumatic/hydraulic pressure switch

15,000 psi (1034 bar)

TECHNICAL FEATURES:

- Sensor MAWP: 15,000 psi (1034 bar)
- Operating temperature range: from -10°C / +60°C
- Valve op. pressure: 22÷116 psi / 1,5÷8 bar
- Process media: Gas – Liquid
- Process media: Filtered air
- Standard materials: AISI 302 / AISI 316L / CW614N / FKM / FILLED PTFE
- Sensor connection: 1/4" BSPP
- Valve connection: Push fittings Ø 4 mm
- Mounting: Front – Rear – Side
- Weight: 1,6 Kg
- Setting range up to: 6,000 psi (414 bar)

OPTIONALS:

- Setting range up to 10,000 psi (689 bar)
- Setting range up to 15,000 psi (1034 bar)
- Special cleaning: Oxygen service


PART NUMBERS:

9900000801 – Pressure switch 15K 60-414 bar NO

9900000802 – Pressure switch 15K 60-414 bar NC

Inspection Certificate

UNI EN10204:2004 type 3.1

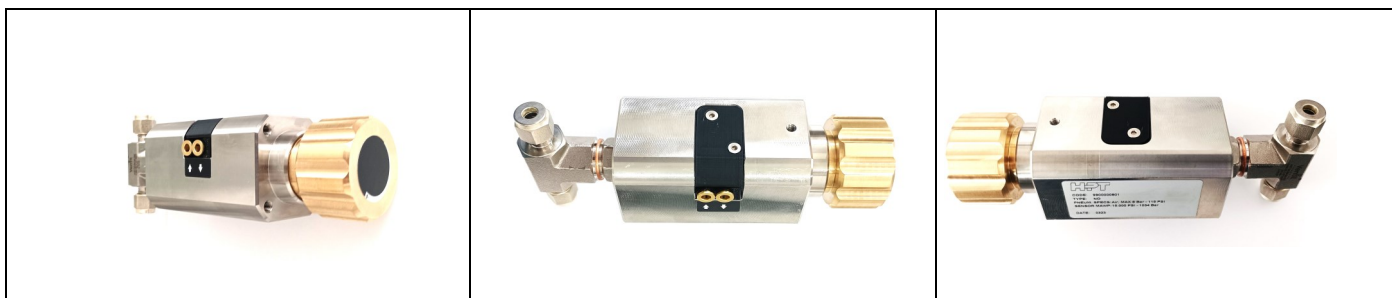

Contacts:

Lavorazioni Tecnologiche srl

Via Po', 1

33054 - Lignano Sabbiadoro (UD) Italy



info@highpressuretechnology.it
www.highpressuretechnology.it
(IT) (+39) 0431-721482